



## **Preferred for Precision Measurements**








- 7" TFT Colour display with LED backlight with excellent viewing angle
- Soft touch key board for improved life and ease of operation
- Machine specific versions for Milling, Turning and EDM applications
- C Optical Glass or Magnetic P67
- 4 axes version with simultaneous 4 axis display with option of internal summing of two axes
- **Constant** Segmented and linear error compensation
- International quality manufacturer
- Ideal replacement for retrofit
- **Probe included as standard**
- Latest SMD manufactured design
- Manufactured to ISO 9001 : 2018



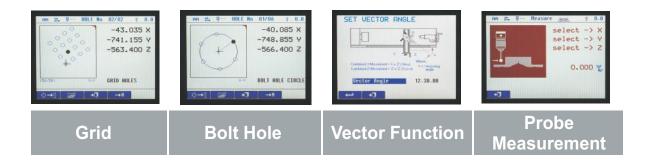





Feature	Mill	Lathe	Simple	EDM	
No. Axes	2, 3, 4	2, 3	2, 3, 4	3	
Display	7 " T	7 " TFT Colour display with LED Backlight			
Case		Die-cast Aluminium			
Power	90	90265 VAC (50/60 Hz) 15W SMPS			
Storage Temperature		-20°C to +70°C			
Operating Temperature		0°C to +50°C			
Relative Humidity		20% to 85% Non-condesing			
Dimensions (H x W x D)		192mm x 290mm x 76mm			
USB Service	<b></b>	<b>(</b>	<b>(</b>	<b>(</b>	
*Auxiliary Port (Input / Output)	<b>(</b>	<b>(</b>		<b>e</b>	
* • • • • • • • • • • • • • • • • • • •	0 4				

\*Auxiliary option include 4 inputs & 4 outputs

Sub datum ( 1000 steps) Home / Machine reference Half function Probe measurements Job timer			
Half function Probe measurements			
Probe measurements			
Job timer			
Shrinkage factor entry			
Vibration filter			
Distance-to-go function			
Password protected mode			
Trignometric calculator			
USB and RS232 option for communication			
Auxillary input / output option			
Angular axis configuration			
Encoder fail detection			
Feed rate display			
Axis Limit with beep indication			


C Standard



## Electronica Mechatronic Systems (India) Pvt. Limited Unit No 37 & 44 Electronic Co-op Estate Pune-Satara Road Pune 411 009 India Tel: +91 20 2422 4440 e-mail: enquiry@electronicaems.com web: www.electronicaems.com

Mill / EDM Specific Functions			
Bolt Hole circular / Arc			
Customisable bolt hole angles			
Arc contouring			
R function			
Grid array function			
Frame function			
Pocketing function			
Linear Bolt Hole function			
Slot function			
Tool database			
Preset Depth (EDM Model only)			
Vertical Milling function			
Lathe Specific Functions			
Tool offsets 99 Nos.			
Axis summing			
Axis vectoring			
Taper calculations			

Rad / Dia display





Dealer Stamp

Version: EI750 05102019 code: 0073-50-0460 Owing to continuous product Research and Development designs and specifications are subject to change.